


# Squares

AD-SS4-I

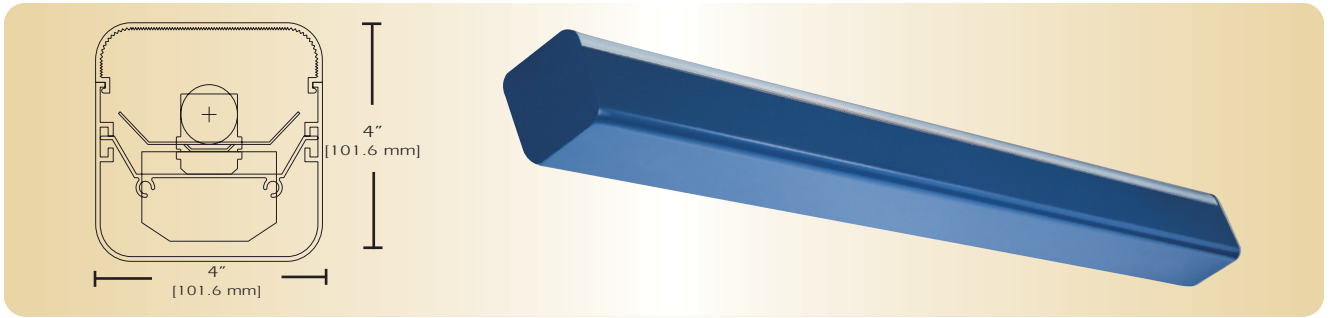

TYPE \_\_\_\_\_

FEATURES

The AD-SS4 soft square series is an extruded aluminum luminaire available with a clear ribbed acrylic lens. The luminaires can be mounted individually, in rows or in any of combination of patterns. The luminaires in this series provide low glare and widespread illumination. The simplicity of the AD-SS4 series is the solution for open spaces while providing maximum design versatility to meet the perceived source of illumination for a specific environment.

SPECIFICATIONS

- Housing:** One piece heavy gauge extruded aluminum 6063T5 alloy welded construction forming a 4" x 4" soft square profile. Finished end caps are welded with no exposed hardware or knockouts.
- Reflector:** Die formed 20-gauge cold rolled steel minimum 90% reflectivity finished in high gloss baked white enamel.
- Shielding:** Standard lens is extruded acrylic with linear ribs (ARL) for efficient light distribution.
- Electrical:** Ballast is electronic, high power factor, thermally protected class P, sound rated A, with less than 20% total harmonic distortion. The minimum number of ballasts will be used unless otherwise specified.
- Mounting:** Standard installation is an adjustable self-locking aircraft assembly 48" x 3/32" in diameter with 5" canopy. One 1/4 SJT straight 54" cord is supplied with each power feed. Standard pendants are available in 24" lengths. See Accessories for additional mounting.
- Finish:** Fixture housing and steel components are finished in baked white enamel applied over a five-stage pretreatment process.
- Lamps:** Fixtures are provided for use with one or two 32 watt T8 lamp or 54 watt T5 HO lamp. (Supplied by Others)
- Certification:** Luminaires are U. L. Listed, C. S. A. certified and are Union Made in the United States of America I.B.E.W.

ORDERING GUIDE

| MODEL NO.     | DIRECTION   | SHIELDING                | LAMPS  | MOUNTING                            | LENGTH   | FINISH                                     | VOLTAGE                    | OPTIONS                  |
|---------------|-------------|--------------------------|--|-------------------------------------|--|--|----------------------------|--------------------------|
| <b>AD-SS4</b> | <b>I</b>    | <b>ARL</b>               | <b>132 T8</b><br><b>232 T8</b><br><b>154T5 HO</b><br><b>254T5 HO</b> | <b>AC</b><br><b>PD</b><br><b>WM</b> | <b>4= ft</b><br><b>8= ft</b>                     | <b>W= White</b><br><b>CC= Custom Color</b> | <b>120v</b><br><b>277v</b> | <b>See Options Below</b> |
|               | I= Indirect | ARL= Acrylic Ribbed Lens | O=Other Specify  | See Accessories                     | for other, please enter row length (eg. 48=48ft) |  |                            |                          |

Example: **AD-SS4-I-ARL-132T8-AC-4-W-120V**  
 AD-SS4 indirect with acrylic ribbed linear lens for one 32 watt T8 lamps including two 48 inch aircraft cables and power feed four foot fixture finished in baked white enamel 120v electronic ballast less than 20% total harmonic distortion.

OPTIONS

- E10=** Electronic ballast, high power factor, thermally protected class P, sound rated A, < 10% total harmonic distortion
- DIM=** Dimming Ballast
- EPC=** Emergency Battery Pack
- EMC=** Emergency Circuit
- TCW=** Two Circuit Wiring
- TDW=** Tandem Wiring
- OTH=** See Accessories for other options available

