DAY-O-LITE

# Profile Series | PRFL-44-DI-WM

| Date | Notes |
|---|---|
| Project | |
| Type Qty | |

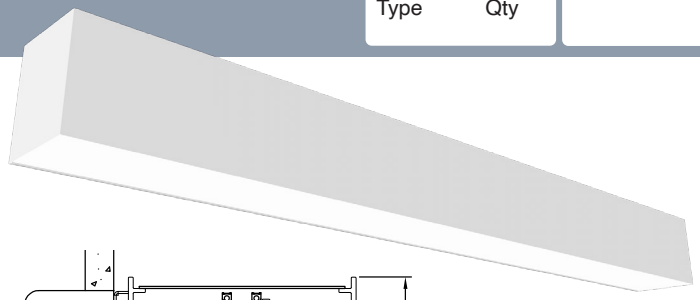

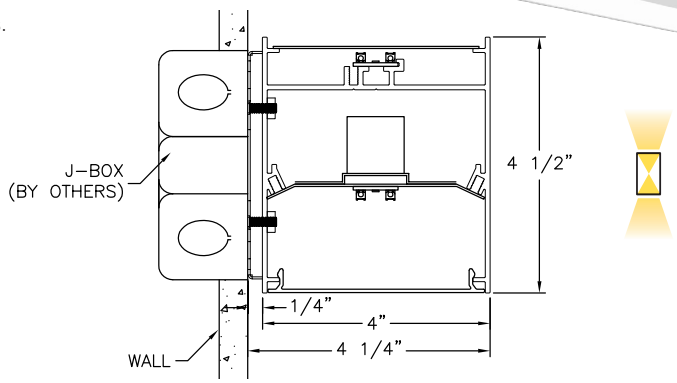


## Features

Extruded aluminum housing w/flat or round end caps.

LED optimized optics for smooth, efficient illumination.

Individual fixtures, continuous rows or custom patterns.

Programmable driver for custom lumen packages.

0-10V dimming to 1% standard. Dim-to-off available.

DMX, Lutron and DALI protocols also available.

Sensor Ready for wireless Smart Lighting Solutions.

80/90CRI, Tunable White, RGBW & RGBWW.

Advanced Color (RGBW) w/pixel control to 5".

Bios SkyBlue™ circadian solutions available.

**DLC** V5.1 Standard Listed up to 122 LPW.

**Declare** Red List Approved.

## Ordering Guide

RS Declare. BAA made in USA DLC LISTED

| MODEL | OPTICS (D/I) | LED[1] | LUMENS[2] | LENGTH | MOUNTING[4] | FINISH | OPTIONS |
|---|---|---|---|---|---|---|---|
| **PRFL-44-DI** | **/** | | | | **WM** | | |
| **PRFL-44-DI**<br>Direct/Indirect | **STANDARD (D/I)**<br>**FL/CA** = Flush Opal Acrylic Direct (snap-in) / Clear Acrylic Indirect<br>**OPTIONAL (D)**<br>DL = 1" Drop Opal Acrylic (snap-in)<br>SCB = Cross Baffle w/acrylic overlay<br>AS* = Asymmetric<br>CM* = Collimating<br>BW* = Batwing (snap-in)<br>**OPTIONAL (I)**<br>FL = Flush Opal (snap-in)<br>SI = Satin Ice<br>AS* = Asymmetric<br>CM* = Collimating<br>BW* = Batwing<br>*Semi-diffuse acrylic lenses. | **STATIC WHITE**<br>27 = 2700K<br>**30** = 3000K<br>**35** = 3500K<br>**40** = 4000K<br>50 = 5000K<br>50 = 5000K<br>**BIOS SkyBlue**<br>Spectrally optimized circadian solutions.<br>**TUNABLE WHITE**<br>(2700K-6500K)<br>2DIM10 = for 0-10V<br>2DMX = for DMX<br>2ESN = for Philips<br>2CAS = for Casambi<br>2LUT = for Lutron<br>**DIM-TO-WARM**<br>(2700K-6500K)<br>DTW = Dim-to-Warm<br>**RGB + WHITE**<br>RGB = RGB<br>RGBW = RGBW<br>RGBWW = RGBWW<br>**ADVANCED COLOR**<br>125mm incremental pixel color control for chase and animated | **LO** = 1251/ft (10W/ft, 125LPW)<br>**SO** = 1670/ft (13W/ft, 125LPW)<br>**HO** = 2084/ft (17W/ft, 125LPW)<br>**CUSTOM**<br>Specify < HO.<br>**DLC LUMENS**[3]<br>@3500K<br>S3D = 1590/ft (13W/ft, 122LPW)<br>@4000K<br>S4D = 1590/ft (13W, 122LPW) | **2** = 2 ft<br>3 = 3 ft<br>**4** = 4 ft<br>5 = 5 ft<br>**6** = 6 ft<br>7 = 7 ft<br>**8** = 8 ft<br>For other enter row length (e.g. 48 = 48 ft) | **WM** = Wall Mount | **W** = White<br>CC = Custom Color<br>AMW = Anti-Microbial White | **DIMMING DRIVERS**<br>**DIM10** = 0-10V (1%) - **Standard**<br>DTO = 0-10V (Dim-to-Off)<br>DIMST = 0-10V Step Dimming<br>347 = 0-10V (347V)<br>DIMSR = DALI Sensor Ready (5.0%)<br>DALI = DALI (5.0%)<br>DMX = DMX<br>**LUTRON™ DIMMING DRIVERS**<br>**LDE1** = Hi-Lume 1% EcoSystem<br>LD2 = Digital 1% (DALI-2)<br>L3DA3W = Hi-Lume 1% 3-Wire<br>**SENSORS & CONTROLS**[5]<br>AVO = Avi-On Sensor<br>AWNS = Lutron Athena Sensor<br>ESN = EasySense Sensor<br>CAS = Casambi Wireless Control<br>**EMERGENCY**[6]<br>EMC = Emergency Circuit<br>GTD = Generator Transfer Device<br>EPC4 = 4W Emergency Battery<br>**EPC6** = 6.5W Emergency Battery<br>EPC10 = 10W Emergency Battery<br>EPC12 = 12W Emergency Battery<br>**WIRING & OTHER**<br>FWH = Flexible Wiring Harness<br>GTD = Generator Transfer Device<br>TCW = Two Circuit Wiring |

[1]All LED, BIOS, Tunable White, DTW, and RGB/W options and Ordering Codes page 2.

[2]Lumens at 80CRI, 3500K, FL lens. Photometry page 4.

[3]**DLC** options are limited to FL optics, static white 35/40K CCT @ 80CRI, SO lumens, all mounting, all finishes, and all options excluding DIMST.

[4]See page 4 for mounting option details.

[5]All Sensor & Control options page 2.

[6]EPC6 is standard unless otherwise specified. EPC not for DMX drivers.

**BAA** letter of compliance available at www.dayolite.com.

RS 10 Day Rapid Ship options in **blue**. Details page 5.

## LED, BIOS, Sensor & Control Ordering Codes

### LED

**Static White**

30 = 3000K 80 CRI
35 = 3500K 80 CRI
40 = 4000K 80 CRI
50 = 5000K 80 CRI

927 = 2700K 90 CRI
930 = 3000K 90 CRI
935 = 3500K 90 CRI
940 = 4000K 90 CRI

**Tunable White**[1]
(2700K-6500K)

2DIM10 = 0-10V 80 CRI
2DMX = DMX 80 CRI
2CAS = Casambi Wireless 80 CRI
2ESN = Philips EasySense 80 CRI
2LUT = Lutron (LD2) 80 CRI

92DIM10 = 0-10V 90 CRI
92DMX = DMX 90 CRI
92CAS = Casambi Wireless 90 CRI
92ESN = Philips EasySense 90 CRI
92LUT = Lutron (LD2) 90 CRI

**Dim-to-Warm**[2]

DTW = 6500K-2700K 80 CRI
9DTW = 6500K-2700K 90 CRI

**RGB/W**[3]

RGB = RGB only
RGB27 = RGB w/2700K
RGB30 = RGB w/3000K
RGB35 = RGB W/3500K
RGB40 = RGB w/4000K
RGB50 = RGB w/5000K
RGBWW = RGB w/2700K-6500K

**Single Color**[4]

RED = Red
BLU = Blue
GRN = Green
AMB = Amber

**Advanced Color**[5]

Advanced Color options combine RGB or RGBW with multi-pixel control for advanced chases, animated visual effects and other programmable scenes with 125mm pixel granularity.

ACRGB = RGB only
AC27 = RGB w/2700K
AC30 = RGB w/3000K
AC40 = RGB w/4000K

### BIOS SkyBlue

BIOS SkyBlue biological technology brings the benefits of blue skies inside. BIOS SkyBlue is the only spectrally optimized circadian solution to target the region that drives wellness benefits including: increased alertness, enhanced productivity, better mood, and better sleep. More information may be found at www.bioslighting.com or by contacting Day-O-Lite directly. All options for 0-10V control.

**BIOS Biological Static**
For daytime applications. BIOS Static Biological LED features key BIOS SkyBlue (490nm) for maximum daytime circadian impact.

B30 = 3000K
B35 = 3500K
B40 = 4000K

**BIOS Biological Dynamic White**
Designed to transition from daytime to evening in a dim-to-warm protocol. The daytime CCT includes full BIOS SkyBlue (490nm) for maximum daytime circadian impact, while the evening spectrum removes BIOS SkyBlue for minimal circadian stimulus after hours.

B30D = 3000K-2700K
B35D = 3500K-3000K
B40D = 4000K-3500K

**BIOS Biological Tunable White**
Designed to transition from daytime to evening in a tunable white protocol. The daytime CCT includes full BIOS SkyBlue (490nm) for maximum daytime circadian impact, while the evening spectrum removes BIOS SkyBlue for minimal circadian stimulus after hours.

B30T = 3000K-2700K
B35T = 3500K-2700K
B40T = 4000K-2700K

### Sensors & Controls

**Sensors***

AVO = Avi-On Occ/Day
AVM = Avi-On Occ (Microwave)
BNV = BubblyNet Occ/Day
ENC = Encelium Occ/Day
ENL = EnLighted Occ/Day/Temp
LEG = Legrand Occ/Day
ANW = Lutron Athena Occ/Day
VIVE = Lutron Vive Occ/Day
NLT = Acuity nLight Occ/Day
NXC = Current NX Occ/Day
ESN = Philips EasySense Occ/Day
WVL = Cooper WaveLinx Occ/Day

**Wireless Control***

CAS = Casambi

*Sensors and control options to be commissioned wirelessly in the field by qualified controls personnel with applicable apps (by others).

[1]Tunable white may be controlled by a number of dimming protocols as shown.

[2]Dim-to-Warm mimics incandescent dimming by warming the CCT from 6500K to 2700K as light levels are dimmed.

[3]All RGB, RGBW and RGBWW options for DMX control (by others). 80 CRI standard.

[4]Single colors are constant voltage LEDs. Dimming requires ELV controller (by others).

[5]White limited to 100L/ft.

## Individual Fixtures & Continuous Rows

| NOMINAL LENGTH | ACTUAL LENGTH | WALL BRKTS. |
|---|---|---|
| 4' | 44 1/2" | 2 |
| 8' | 89" | 3 |
| 12' | 133 1/2" | 5 |
| 16' | 178" | 8 |
| 20' | 222 1/2" | 8 |
| 24' | 267" | 9 |

Individual fixtures and rows are continuously illuminated and joined with included aligner brackets and hardware. Power feed locations and mounting locations are shown below.

Continuous rows longer than 8' and patterns, including EPC/EMC and sensor locations must be approved prior to manufacturing.

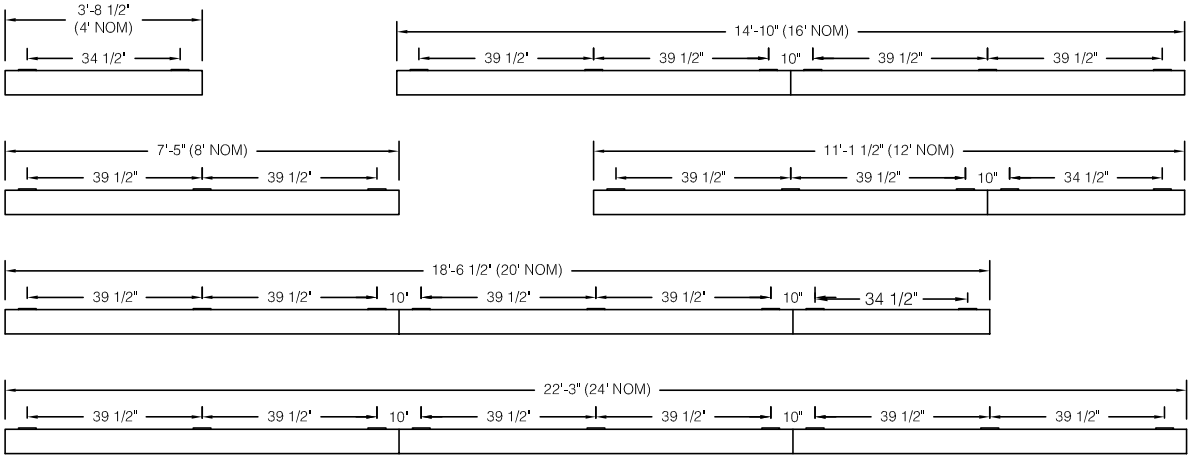


## Emergency & Sensor Locations

EPC will control entire length of individual fixtures. Individual fixtures of differing lengths will deliver the same lumens under EPC power (a 4' fixture will deliver the same total lumens over half the length of an 8' fixture). EMC controlled individual fixtures will deliver lumens per foot as originally specified, unless dimmed at time of power loss. Consult factory for EMC dimming override device.

4' Individual



8' Individual



For individual fixtures to 8' EPC/EMC will power entire fixture.

24' Row (3x8')



For continuous rows longer than 8' one EPC/EMC will be located in the feed section (end-left) of the row as shown below.

24' Row (3x8')



If two EPC/EMC's are required their default locations will be in the feed section (end-left) and last section (end-right) as below.

24' Row (3x8')



Custom placement of one or more EPC/EMC's must be clearly identified during ordering.

8' Individual



SENSORS (Integral) for individual fixtures will control entire length of fixture and will be located on feed end of fixture.

24' Row (3x8')



SENSORS for rows by default will control the feed section (end-left) of the row. Sensors can control more than an 8' section within a row. Consult factory for sensor/section options, or for multiple sensors in a continuous row.

## Mounting & Optics Details

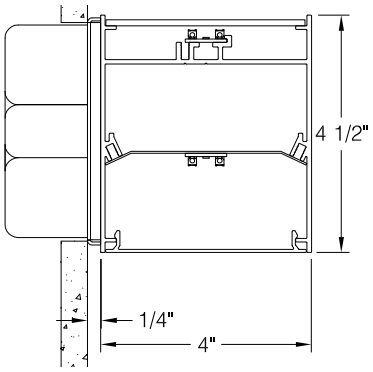


FL Lens Direct
CA Lens Indirect

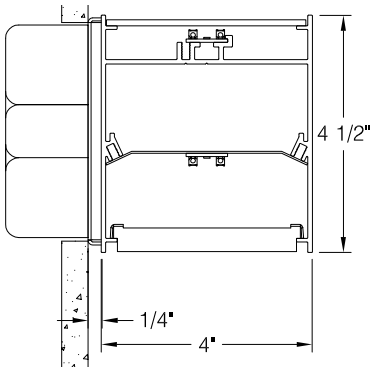


SCB Lens Direct
CA Lens Indirect

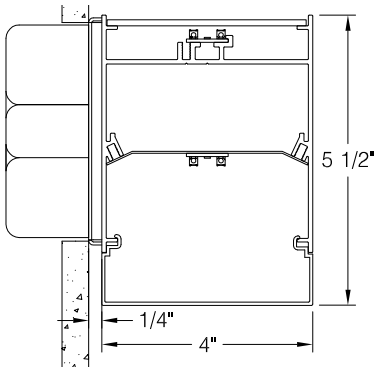


DL Lens Direct (1" Drop)
CA Lens Indirect

## Photometry



PRFL-24-DI-FL/CA-35-**LO**-4
Flush Lens Direct w/Clear Acrylic Dust Covers

3500K CCT
WATTS: 40
LUMENS: 5002
LPW: 125

PRFL-24-DI-FL/CA-35-**SO**-4
Flush Lens Direct w/Clear Acrylic Dust Covers

3500K CCT
WATTS: 53
LUMENS: 6678
LPW: 125

PRFL-24-DI-FL/CA-35-**HO**-4
Flush Lens Direct w/Clear Acrylic Dust Covers

3500K CCT
WATTS: 67
LUMENS: 8334
LPW: 125

PRFL-24-DI-FL/CA-35-**S3D**-4
**DLC** V5.1 Standard

3500K CCT
WATTS: 52
LUMENS: 6360
LPW: 122

PRFL-24-DI-F/CA-40-**S4D**-4
**DLC** V5.1 Standard

4000K CCT
WATTS: 52
LUMENS: 6370
LPW: 122

3500K @ 80CRI, 4', 43% Direct, 57% Indirect Distribution, FL/CA lens.
Use the following multipliers for other CCTs: 2700K x 0.96, 3000K x 0.98, 4000K x 1.02, 5000K x 1.03. IES files @ www.dayolite.com

## Specifications

**CONSTRUCTION:** Extruded aluminum housing. 20 gauge cold rolled steel internal components.

**REFLECTOR:** Die-formed steel finished in highly reflective baked white enamel with pre-finished reflective LED tray.

**OPTICS:** Direct opal acrylic Flush lens is standard, 1" acrylic Drop lens, Steel Cross Baffle with acrylic overlay optional. Indirect Clear Acrylic dust covers standard, Flush lens, Satin Ice, Asymmetrical, Batwing, Collimating and Black Out lenses available.

**LED:** Static white LED modules in 27/30/35/40 & 50K CCT, 80/90CRI. Lumen maintenance minimum $L_{70}$= 50,000 hours. 3 SDCM color consistency. BIOS SkyBlue, RGB, RGBW and Tunable White and Advanced Color options available.

**DRIVER:** Standard driver is Class 2 AOC 0-10V to 1%, 120/277V input, PF > 90%, THD < 20 @ 120V. Additional dimming protocols available. All drivers prewired from factory for connection to control system (by others). Field replaceable.

**MOUNTING:** Standard installation is wall mount with included mounting brackets and hardware. Requires single-gang j-box supplied by others.

**FINISH:** Housing and components finished in baked white enamel.

**CERTIFICATION:** cETLus listed conforming to UL STD. 1598 and certified to CSA STD C22.2 NO. 250.0. Suitable for dry & damp locations. Union Made in the United States of America. I.B.E.W., BAA compliant, DLC V5.1 Standard Listed, Declare Red List Approved.

**LEGAL:** Day-O-Lite, a division of SCW Corporation. All rights reserved. The Day-O-Lite logo is a registered trademark of SCW Corporation. Day-O-Lite reserves the right to change specifications without notice for product improvement.

## Specifications

**CONSTRUCTION:** Extruded aluminum housing. 20 gauge cold rolled steel internal components.

**REFLECTOR:** Highly reflective baked white enamel with pre-finished reflective LED tray.

**OPTICS:** Direct opal acrylic Flush lens is standard. 1" acrylic Drop lens, Steel Cross Baffle with acrylic overlay optional. Indirect Clear Acrylic dust covers standard, Flush lens, Satin Ice, Asymmetrical, Batwing, Collimating and Black Out lenses available.

**LED:** Static white LED modules in 30/35/40 & 50K CCT, 80/90CRI. Lumen maintenance minimum $L_{70}$= 50,000 hours. 3 SDCM color consistency. BIOS SkyBlue, RGB, RGBW, RGBWW, Advanced Color, Tunable White and Dim-to-Warm options available; field replaceable.

**DRIVER:** Standard driver is Class 2 AOC 0-10V to 1%, Dim-to-Off available. 120/277V input, PF > 90%, THD < 20 @ 120V. DMX, DALI & Lutron protocols available. All drivers prewired for connection to control system (by others); field replaceable.

**MOUNTING**: Installation is wall mount with included mounting brackets and hardware. Requires single-gang j-box supplied by others.

**FINISH:** Housing and components finished in baked white enamel. Canopies and pendant stems are white enamel unless otherwise specified. 5" Feed canopy w/2" Suspension canopies.

**CERTIFICATION:** cETLus listed conforming to UL STD. 1598 and certified to CSA STD C22.2 NO. 250.0. Suitable for dry & damp locations. Union Made in the United States of America. I.B.E.W., BAA compliant, DLC V5.1 Standard Listed. Declare Red List Approved.

**LEGAL:** Day-O-Lite, a division of SCW Corporation. All rights reserved. The Day-O-Lite logo is a registered trademark of SCW Corporation. Day-O-Lite reserves the right to change specifications without notice for product improvement.

## RS Rapid Ship Program

Rapid Ship products are estimated to ship 10 business days or less from the morning the order is received and confirmed. Linear rows will ship 10 business days or less from the day the layout drawings are approved. Orders confirmed and layouts approved after 12:00 p.m. Eastern Time are estimated to ship 10 days or less from the following business morning. Please refer to complete program Terms & Conditions at www.dayolite.com.

Rapid Ship options are limited to those highlighted in **blue** on the Ordering Guide. 400' max individual or continuous row allowed. Consult factory for additional information.