



MicroLux Series - Petit Cube | MCRL-PC-DI

Date

Notes

Project

Type

Qty

1"x1"

MicroSpot

25° Vertical Spot
35° Vertical Spot
45° Vertical Spot

Precision Optics

UGR < 12

MicroBaffle

Cross Baffle
Lambertian
Batwing - 120° & 150°
Beam - 40° & 70°
Asymmetric - 30° to 60°

Extruded aluminum housing

Custom Finishes (RAL)

Flush Lens

Lambertian
Batwing - 120° & 150°
Beam - 40° & 70°
Asymmetric - 30° to 60°

Light Shaping Lenses

Regressed Lens

Lambertian
Batwing - 120° & 150°
Beam - 40° & 70°
Asymmetric - 30° to 60°

MicroLux is designed for maximum performance at minimal scale with an array of useful and decorative optical and LED options suited to a host a multitude of architectural and commercial interior applications.



Distribution



Optics

MicroSpot
MicroBaffle
Flush Lens
Regressed Lens

Lumens

1000L/ft Direct
1000L/ft Indirect

Mounting

Suspended
Surface Ceiling

LEDs

Static White
Tunable White
Dim-to-Warm
Bios SkyBlue
RGB
RGBW

Drivers

0-10V
DALI
DMX
Lutron
ELV
SR

Options

EM Battery
EM Circuit
Sensors (remote)
Wireless Control

Declare.

BAA




Ordering Guide

MODEL	OPTICS - DIRECT	OPTICS - INDIRECT	STATIC WHITE	TUNABLE WHITE & DIM-TO-WARM	RGB/W	BIOS SKYBLUE
MCRL-PC-DI						
MCRL-PC-DI Direct Indirect	<i>Optics - Direct details page 3.</i> LENSES FL = Flush RL = Regressed DL = Drop Lens X" BFW = Baffle White BFB = Baffle Black DISTRIBUTION (add) LB = Lambertian NB = Narrow Beam 40° MB = Medium Beam 70° BW6 = Batwing 60° BW7 = Batwing 70° AS3 = Asymmetric 30° @ 10° Tilt AS4 = Asymmetric 40° @ 15° Tilt Enter Optics as: XXX(Lens)/XXX(Dist) RLNB = Regressed Lens/ Narrow Beam SPOTS RO25 = Round 25° RO35 = Round 35° RO45 = Round 45° SO25 = Square 25° SO35 = Square 35° SO45 = Square 45° <i>Add W or B suffix for White or Black: R25B = Round 25° Balck Spot</i>	<i>Optics - Indirect details page 3.</i> LENSES LBC = Lambertian Clear LBF = Lambertian Frost BW12 = Batwing 120° BW15 = Batwing 150° AS4 = Asymmetric 45° @ 60° Tilt AS6 = Asymmetric 60° @ 40° Tilt	NA = Not Applicable STATIC WHITE 80 CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 90 CRI 927 = 2700K 930 = 3000K 935 = 3500K 940 = 4000K 950 = 5000K	NA = Not Applicable TUNABLE TWO CHANNEL Fixed Range 2700K-6500K, 80 CRI 2DIM10 = for 0-10V 2DMX = for DMX 2ESN = for Philips 2CAS = for Casambi 2LUT = for Lutron TUNABLE THREE CHANNEL* Factory Programmable Custom CCT Range* 1800K-6500K, 92 CRI 3DIM10 = for 0-10V DIM-TO-WARM TWO CHANNEL Fixed Range CCT 2700K-6500K 80/90 CRI 2DTW = DTW 80 CRI 92DTW = DTW 90 CRI DIM-TO-WARM THREE CHANNEL* Factory Programmable Custom CCT Range* 1800K-6500K, 92 CRI CRI3DTW = DTW 92 CRI *Enter Custom Range: XX/XX = XX Range 18/65 = 18K-65K 22/54 = 22K-54K	NA = Not Applicable RGB/WHITE 80 CRI (WHITE) RGB = RGB RGB27 = RGB/27K RGB30 = RGB/30K RGB35 = RGB/35K RGB40 = RGB/40K RGB50 = RGB/50K RGBWW = RGBW 90 CRI (WHITE) RGB = RGB RGB927 = RGB/27K RGB930 = RGB/30K RGB935 = RGB/35K RGB940 = RGB/40K RGB950 = RGB/50K RGB9WW = RGBWW SINGAL COLORS R = Red G = Green B = Blue A = Amber	NA = Not Applicable BIOS BIOLOGICAL STATIC WHITE B27 = 2700K B30 = 3000K B35 = 3500K B40 = 4000K B50 = 5000K BIOS BIOLOGICAL DYNAMIC WHITE (DIM-TO-WARM) B30D = 3000K-2700K B35D = 3500K-3000K B40D = 4000K-3500K BIOS BIOLOGICAL TUNABLE WHITE B30T = 3000K-2700K B35T = 3500K-2700K B40T = 4000K-3500K <i>BIOS SKYBLUE available in 80 CRI only.</i>


LUMENS DIRECT	LUMENS INDIRECT	MOUNTING	LENGTH	FINISH	DRIVER / EMERGENCY/ WIRING	SENSORS & CONTROLS
STANDARD <i>w/FL/LB Lens. See Page 3 for other optics.</i>	STANDARD <i>w/LB Lens. See Page 3 for other optics.</i>	PSW = Powered Suspension (White/White canopies)	2 = 2 ft 3 = 3 ft 4 = 4 ft 5 = 5 ft 6 = 6 ft 7 = 7 ft 8 = 8 ft	WH = White	DRIVERS <i>All drivers remote mount only.</i>	SENSORS - OCC/DAY <i>Remote mount only.</i>
LO = 600/ft 5.0W/ft 119LPW	LO = 600/ft 5.0W/ft 119LPW	PSB = Powered Suspension (Black/Black Canopies)		CC = Custom Color (RAL#)	DIM10 = 0-10V (1%) DTO = 0-10V (Dim-to-Off) DIMST = 0-10V Step Dimming DIMSR = DALI Sensor Ready (5.0%) DALI = DALI (5.0%) DMX = DMX	AVO = Avi-O BNV = BubblyNet LEG = Legrand ANWS = Lutron Athena VIVE = Lutron Vive NLT = Acuity nLight NXC = Current NX ESN = Philips EasySense INT = Philips Interact WVL = Cooper WaveLinX
SO = 800/ft 6.7W/ft 119LPW	SO = 800/ft 6.7W/ft 119LPW	PSG = Powered Suspension (Gray/White Canopies)	<i>For rows enter length in feet.</i>	AM = Anti Microbial White	LUTRON™ LDE1 = Hi-Lume 1% EcoSystem LD2 = Digital 1% (DALI-2) L3DA3W = Hi-Lume 1% 3-Wire	
HO = 1000/ft 8.4W/ft 140LPW	HO = 1000/ft 8.4W/ft 140LPW		<i>For Patterns please provide a dimensioned drawing.</i>		EMERGENCY⁵ <i>Remote mount only.</i>	WIRELESS CONTROL <i>Remote mount only.</i>
CUSTOM <i>Enter < 1000L/ft</i>	CUSTOM <i>Enter < 1000L/ft</i>		<i>Day-O-Lite will provide factory drawings for approval.</i>		EMC = Emergency Circuit GRD = Generator Transfer Device EPC4 = 4W Emergency Battery EPC6 = 6.5W Emergency Battery EPC10 = 10W Emergency Battery	AVN = Avi-On Node ANWR = Lutron Athena CAS = Casambi
					WIRING TCW = Two Circuit Wiring FWH = Flexible Wiring Harness	

Direct Optics


LB: Lambertian




MB: Medium Beam 70°




NB: Narrow Beam 40°




BW7: Batwing 70°




BW6: Batwing 60°




AS4: Asymmetric
40° @ 15° Tilt




AS3: Asymmetric
30° @ 10° Tilt




S45: MicroSpot 45°



S35: MicroSpot 35°




S25: MicroSpot 25°




Indirect Optics


LB: Lambertian




BW12: Batwing 120°




BW15: Batwing 150°



AS4: Asymmetric
45° @ 60° Tilt




AS6: Asymmetric
60° @ 40° Tilt



Individual Fixtures & Continuous Rows


NOMINAL LENGTH	ACTUAL LENGTH	SUSP. 1 O.C.	SUSP. 2 O.C.	SUSP. 3 O.C.
4'	4' 2"	4'		
8'	8' 2"	8'		
12'	12' 2"	8'	4'	
16'	16' 2"	8'	8'	
20'	20' 2"	8'	8'	4'
24'	24' 2"	8'	8'	8'

Power feed and suspension locations shown below. Continuous rows longer than 8' including EPC/EMC and sensor locations must be approved prior to manufacturing.

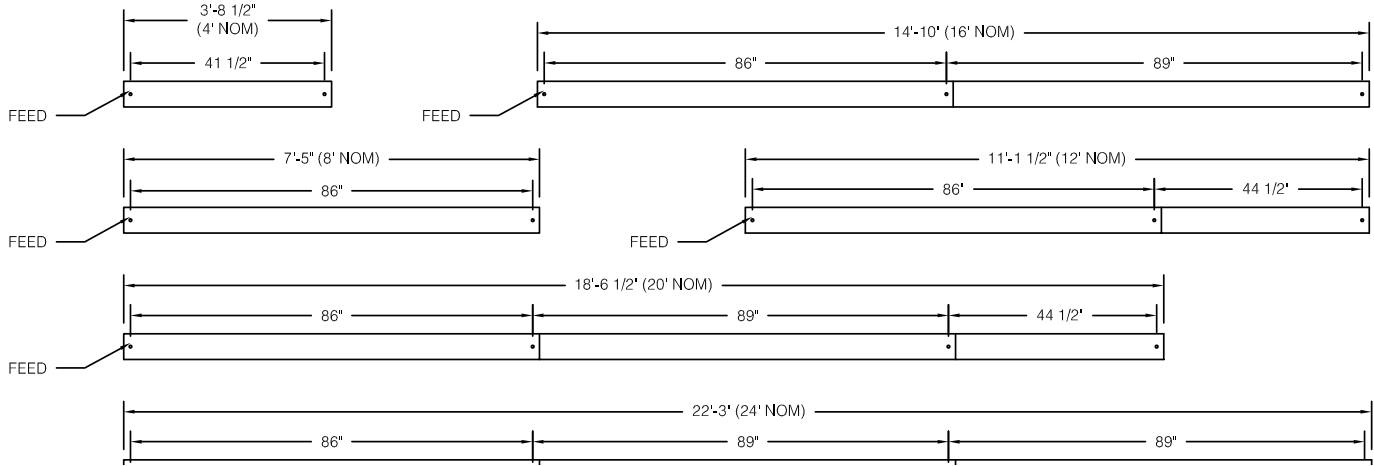


Emergency Locations

EPC will control entire length of individual fixtures. Individual fixtures of differing lengths will deliver the same lumens under EPC power (a 4' fixture will deliver the same total lumens over half the length of an 8' fixture). EMC controlled individual fixtures will deliver lumens per foot as originally specified, unless dimmed at time of power loss. Consult factory for EMC dimming override device.

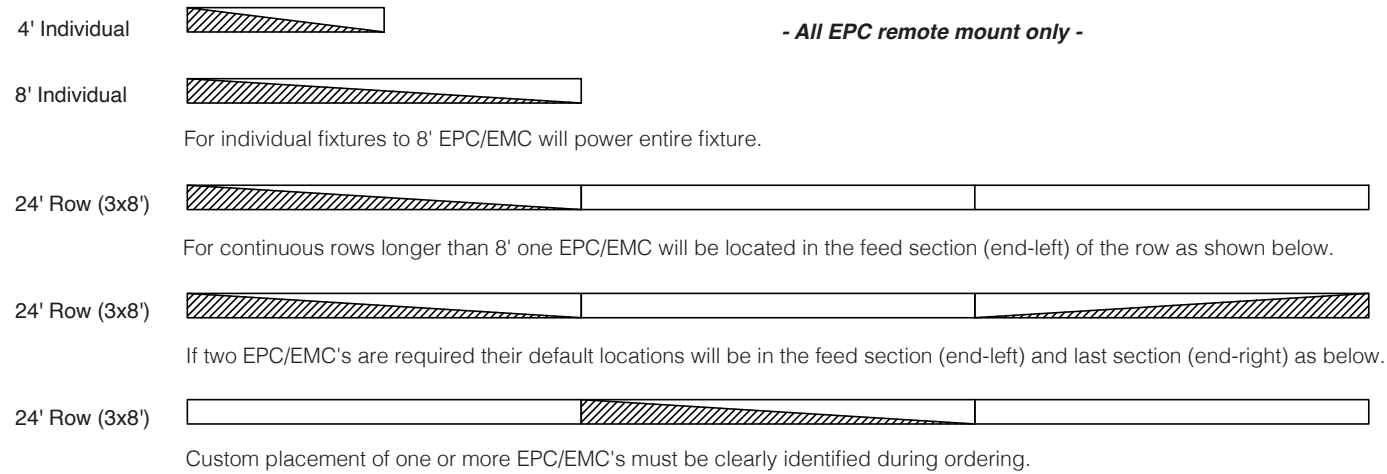

Sensors

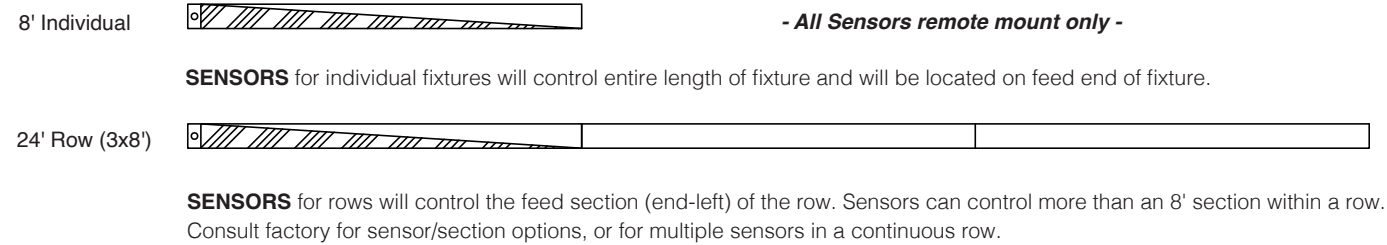

Specifications

CONSTRUCTION: Extruded aluminum housing. 20 gauge cold rolled steel internal components.

REFLECTOR: Highly reflective baked white enamel with pre-finished reflective LED tray.

OPTICS: Flush and Regressed Lambertian, batwing, and asymmetric acrylic lens; and Spot optics in wide, medium and narrow beam.

LED: Static white LED modules in 27/30/35/40 & 50K CCT, 80/90CRI. Lumen maintenance minimum $L_{70} = 50,000$ hours. 3 SDCM color consistency. BIOS SkyBlue, RGB, RGBW, RGBWW, Tunable White and Dim-to-Warm options available; field replaceable.

DRIVER: Standard driver is Class 2 AOC 0-10V to 1%, Dim-to-Off available. 120/277V input, PF > 90%, THD < 20 @ 120V. DMX, DALI & Lutron protocols available. All drivers prewired for connection to control system (by others); field replaceable.

MOUNTING: Standard options include adjustable self-locking aircraft cables (AC), and rigid pendant stems (PD). AC assembly is 48" x 1/16" with a 5" feed canopy and 2" suspension canopies. 18 gauge power and 22 gauge dimming control SJT feed.

FINISH: Housing and components finished in baked white enamel. Canopies and pendant stems are white enamel unless otherwise specified. 5" Feed canopy w/2" Suspension canopies.

CERTIFICATION: cETLus listed conforming to UL STD. 1598 and certified to CSA STD C22.2 NO. 250.0. Union Made in the United States of America. I.B.E.W., BAA compliant, Suitable for damp locations. Declare Red List Approved.

LEGAL: Day-O-Lite, a division of SCW Corporation. All rights reserved. The Day-O-Lite logo is a registered trademark of SCW Corporation. Actual product performance may differ due to end user environment, application and installation. Luminaires have been tested at 25° C ambient temperature. Consult Day-O-Lite for high-ambient conditions. Day-O-Lite reserves the right to change specifications without notice for product improvement. DMX systems, sensors and control options to be commissioned by qualified personnel.

Product Resources

IES Files



Install Guide



Bios Guide



DMX Guide



Wood Grain Finish



Brand Assets

USA, BAA, BABAA



Declare Labels



Sustainability Report



Terms & Conditions

Terms & Conditions



Warranty



LED L_{70} Lifetime

