

ATHL2 WALL MOUNT INSTRUCTIONS



RISK OF ELECTRICAL SHOCK. **DISCONNECT POWER** BEFORE INSTALLATION OR SERVICING.




WALL TO BE PROPERLY REINFORCED TO SUPPORT WEIGHT OF THE FIXTURE.




MOUNTING DIMENSIONS.



FAILURE TO COMPLY TO

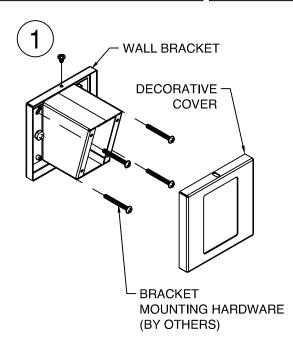

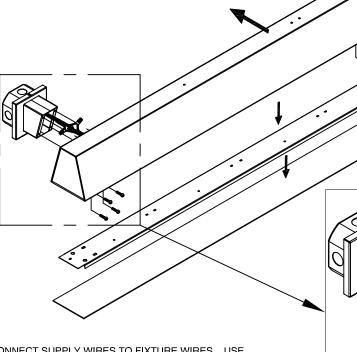

LENS SUPPLY WIRES FIXTURE WIRES

LED TRAY

1. INSTALL WALL MOUNT BRACKETS TO WALL USING APPROPRIATE HARDWARE (BY OTHERS). REFER TO JOB DRAWINGS FOR MOUNTING LOCATIONS.

2. MOUNT FIXTURE TO WALL BRACKET. REMOVE LENS AND LED TRAY. USE SUPPLIED HARDWARE TO SECURE FIXTURE TO WALL BRACKET.

3.CONNECT SUPPLY WIRES TO FIXTURE WIRES. USE APPROPRIATE STRAIN RELIEF AS REQUIRED BY LOCAL ELECTRICAL CODES. REFER TO JOB DRAWINGS FOR JOB SPECIFIC WIRING

4.REINSTALL LED TRAY AND LENS AFTER ALL WIRING CONNECTIONS ARE MADE, INSTALLATION IS COMPLETE

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. DISCONNECT POWER DURING INSTALLATION/SERVICING. ROW CONFIGURATION IS JOB SPECIFIC, CONSULT SHOP DRAWINGS BEFORE CONSTRUCTING ROWS, STANDARD OPTIONS/SIZES SHOWN, OTHER OPTIONS AVAILABLE WITH SIMILAIR INSTALLATION, BE SURE TO UNDERSTAND ALL PROCEDURES PRIOR TO INSTALLATION, IMPORTANT: THE NATIONAL ELECTRIC CODE REQUIRES THAT ANY FIXTURE IN EXCESS OF 50 POUNDS MUST BE INDEPENDENTLY SUPPORTED OF THE OUTLET BOX, DAY-O-LITE IS NOT RESPONSIBLE FOR INADEQUATE REINFORCEMENT OF STRUCTURAL SUPPORT SYSTEMS. DAY-O-LITE RESERVES THE RIGHT TO MAKE ANY MECHANICAL OR MATERIAL CHANGES TO THE FIXTURES WHICH DO NOT AFFECT THE APPEARANCE OR PERFORMANCE. THIS PRINT IS THE PROPERTY OF DAY-O-LITE AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT WRITTEN CONSENT OF DAY-O-LITE.

MODEL NO.: ATHL2-WM----

MOUNTING

HARDWARE

CONTACT INFORMATION:

126 Chestnut Street, Warwick, RI 02888 Tel. (401) 467-8232 | Fax. (401) 941-2960 E-mail: sales@dayolite.com WWW: http://www.davolite.com

Lighting Without Limits

PAGE:

PART NUMBER: 970059A0

ISSUED ON: SHEET 1 OF 1 11/26/2019