DAY-O-LITE

Profile Series | PRFL-24-I-WM

Date	Notes
Project	
Type/Qty	

Features

Extruded aluminum housing w/flat or round end caps.

LED optimized optics for smooth, efficient illumination.

Individual fixtures, continuous rows or custom patterns.

Programmable driver for custom lumen packages.

0-10V dimming to 1% standard. Dim-to-off available.

DMX, Lutron and DALI protocols also available.

Sensor Ready for wireless Smart Lighting Solutions.

80/90CRI, Tunable White, RGBW & RGBWW.

Bios SkyBlue™ circadian solutions available.

DLC V5.1 Standard Listed up to 154 LPW.

Declare Red List Approved.

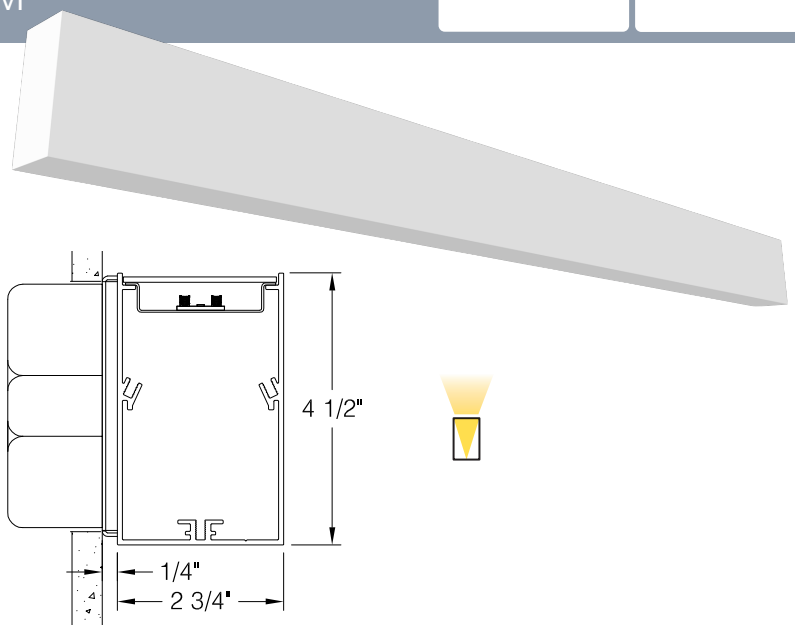

Ordering Guide

RS Declare. BAA

MODEL	OPTICS	LED[1]	LUMENS[2]	LENGTH	MOUNTING[4]	FINISH	OPTIONS
PRFL-24-I							
PRFL-24-I Indirect	**STANDARD** **CA** = Clear Acrylic (dust covers) **OPTIONAL** **SI** = Satin Ice Acrylic FL = Flush Opal Acrylic (snap-in) AS* = Asymmetric CM* = Collimating BW* =Bat Wing *Semi-diffuse acrylic lenses.	**STATIC WHITE** 27 = 2700K **30** = 3000K **35** = 3500K **40** = 4000K 50 = 5000K **BIOS SkyBlue** Spectrally optimized circadian solutions. **TUNABLE WHITE** (2700K-6500K) 2DIM10 = for 0-10V 2DMX = for DMX 2ESN = for Philips 2CAS = for Casambi 2LUT = for Lutron **DIM-TO-WARM** (2700K-6500K) DTW = Dim-to-Warm **RGB + WHITE** RGB = RGB RGBW = RGBW RGBWW = RGBWW	**LO** = 677/ft (5W/ft, 135LPW) **SO** = 902/ft (7W/ft, 135LPW) **HO** = 1128/ft (8W/ft, 135LPW) **CUSTOM** Please specify < HO. **DLC LUMENS**[3] @3500K S3D = 860/ft (6W/ft, 150LPW) @4000K S4D = 885/ft (6W/ft, 154LPW)	**2** = 2 ft 3 = 3 ft **4** = 4 ft 5 = 5 ft **6** = 6 ft 7 = 7 ft **8** = 8 ft For other enter row length (48 = 48 ft)	**WM** = Wall Mount	**W** = White CC = Custom Color AMW = Anti-Microbial White	**DIMMING DRIVERS** **DIM10** = 0-10V (1%) - **Standard** DTO = 0-10V (Dim-to-Off) DIMST = 0-10V Step Dimming 347 = 0-10V (347V) DIMSR = DALI Sensor Ready (5.0%) DALI = DALI (5.0%) DMX = DMX **LUTRON™ DIMMING DRIVERS** **LDE1** = Hi-Lume 1% EcoSystem LD2 = Digital 1% (DALI-2) L3DA3W = Hi-Lume 1% 3-Wire **SENSORS & CONTROLS**[5] **EMERGENCY BATTERY**[6] EPC4 = 4W Integral Battery **EPC6** = 6.5W Integral Battery EPC10 = 10W Integral Battery EPC12 = 12W Integral Battery **WIRING & OTHER** FWH = Flexible Wiring Harness GTD = Generator Transfer Device

[1]All LED, BIOS, Tunable White, DTW, and RGB/W options and Ordering Codes page 2.

[2]Lumens at 80CRI, 3500K, CA lens. Photometry page 4.

[3]**DLC** options are limited to CA optics, static white 35/40K CCT @ 80CRI, SO lumens, all mounting, all finishes, and all options excluding DIMST.

[4]See page 4 for mounting option details.

[5]All Sensor & Control options page 2.

[6]EPC6 is standard unless otherwise specified. EPC not for DMX drivers.

BAA letter of compliance available at www.dayolite.com.

RS 10 Day Rapid Ship options in **blue**. Details page 6.

LED, BIOS, Sensor & Control Ordering Codes

LED

Static White

30 = 3000K 80 CRI
35 = 3500K 80 CRI
40 = 4000K 80 CRI
50 = 5000K 80 CRI

927 = 2700K 90 CRI
930 = 3000K 90 CRI
935 = 3500K 90 CRI
940 = 4000K 90 CRI

Tunable White[1]
(2700K-6500K)

2DIM10 = 0-10V 80 CRI
2DMX = DMX 80 CRI
2CAS = Casambi Wireless 80 CRI
2ESN = Philips EasySense 80 CRI
2LUT = Lutron (LD2) 80 CRI

92DIM10 = 0-10V 90 CRI
92DMX = DMX 90 CRI
92CAS = Casambi Wireless 90 CRI
92ESN = Philips EasySense 90 CRI
92LUT = Lutron (LD2) 90 CRI

Dim-to-Warm[2]

DTW = 6500K-2700K 80 CRI
9DTW = 6500K-2700K 90 CRI

RGB/W[3]

RGB = RGB only
RGB27 = RGB w/2700K
RGB30 = RGB w/3000K
RGB35 = RGB W/3500K
RGB40 = RGB w/4000K
RGB50 = RGB w/5000K
RGBWW = RGB w/2700K-6500K

Single Color[4]

RED = Red
BLU = Blue
GRN = Green
AMB = Amber

BIOS SkyBlue

BIOS SkyBlue biological technology brings the benefits of blue skies inside. BIOS SkyBlue is the only spectrally optimized circadian solution to target the region that drives wellness benefits including: increased alertness, enhanced productivity, better mood, and better sleep. More information may be found at www.bioslighting.com or by contacting Day-O-Lite directly. All options for 0-10V control.

BIOS Biological Static
For daytime applications. BIOS Static Biological LED features key BIOS SkyBlue (490nm) for maximum daytime circadian impact.

B30 = 3000K
B35 = 3500K
B40 = 4000K

BIOS Biological Dynamic White
Designed to transition from daytime to evening in a dim-to-warm protocol. The daytime CCT includes full BIOS SkyBlue (490nm) for maximum daytime circadian impact, while the evening spectrum removes BIOS SkyBlue for minimal circadian stimulus after hours.

B30D = 3000K-2700K
B35D = 3500K-3000K
B40D = 4000K-3500K

BIOS Biological Tunable White
Designed to transition from daytime to evening in a tunable white protocol. The daytime CCT includes full BIOS SkyBlue (490nm) for maximum daytime circadian impact, while the evening spectrum removes BIOS SkyBlue for minimal circadian stimulus after hours.

B30T = 3000K-2700K
B35T = 3500K-2700K
B40T = 4000K-2700K

Sensors & Controls

Sensors*

AVO = Avi-On Occ/Day
AVM = Avi-On Occ (Microwave)
BNV = BubblyNet Occ/Day
ENC = Encelium Occ/Day
ENL = EnLighted Occ/Day/Temp
LEG = Legrand Occ/Day
ANW = Lutron Athena Occ/Day
VIVE = Lutron Vive Occ/Day
NLT = Acuity nLight Occ/Day
NXC = Current NX Occ/Day
ESN = Philips EasySense Occ/Day
WVL = Cooper WaveLinx Occ/Day

Wireless Control*

CAS = Casambi

*Sensors and control options to be commissioned wirelessly in the field by qualified controls personnel with applicable apps.

[1]Tunable white may be controlled by a number of dimming protocols as shown.

[2]Dim-to-Warm mimics incandescent dimming by warming the CCT from 6500K to 2700K as light levels are dimmed.

[3]All RGB, RGBW and RGBWW options for DMX control (by others). 80 CRI standard.

[4]Single colors are constant voltage LEDs. Dimming requires ELV controller (by others).

Individual Fixtures & Continuous Rows

NOMINAL LENGTH	ACTUAL LENGTH	WALL BRKTS.	WALL O.C. 1	WALL O.C. 2	WALL O.C. 3
4'	48"	2	46"		
6'	72"	2	70"		
8'	96"	2	94"		
12'	144"	3	94"	48"	
16'	192"	3	94"	96"	48"
20'	240"	4	94"	96"	48"
24'	288"	4	94"	96"	96"

Individual fixtures and rows are continuously illuminated and joined with included aligner brackets and hardware. Power feed locations and mounting locations are shown below.

Continuous rows longer than 8' and patterns, including EPC/EMC and sensor locations must be approved prior to manufacturing.

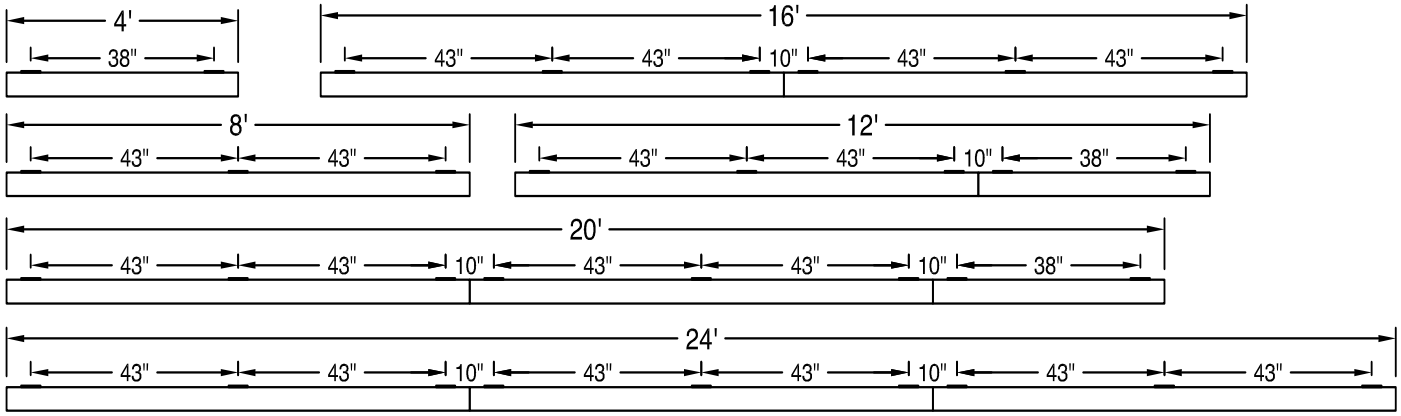

Emergency & Sensor Locations

EPC will control entire length of individual fixtures. Individual fixtures of differing lengths will deliver the same lumens under EPC power (a 4' fixture will deliver the same total lumens over half the length of an 8' fixture). EMC controlled individual fixtures will deliver lumens per foot as originally specified, unless dimmed at time of power loss. Consult factory for EMC dimming overide device.

4' Individual 

8' Individual 

For individual fixtures to 8' EPC/EMC will power entire fixture.

24' Row (3x8') 

For continuous rows longer than 8' one EPC/EMC will be located in the feed section (end-left) of the row as shown below.

24' Row (3x8') 

If two EPC/EMC's are required their default locations will be in the feed section (end-left) and last section (end-right) as below.

24' Row (3x8') 

Custom placement of one or more EPC/EMC's must be clearly identified during ordering.

8' Individual 

SENSORS (Integral) for individual fixtures will control entire length of fixture and will be located on feed end of fixture.

24' Row (3x8') 

SENSORS for rows by default will control the feed section (end-left) of the row. Sensors can control more than an 8' section within a row. Consult factory for sensor/section options, or for multiple sensors in a continuous row.

Mounting & Optics Details

Standard installation is wall mount with included mounting brackets and hardware. Requires single-gang j-box. Lenses are lay-in standard.

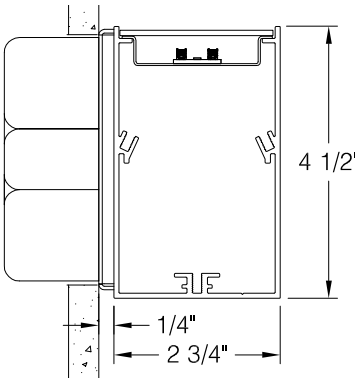

CA Lens

Photometrics



Flush Lens

RFL-24-I-CA-35-**LO**-4
Clear Acrylic Lens

3500K CCT
WATTS: 20
LUMENS: 2707
LPW: 135

PRFL-24-I-CA-35-**SO**-4*
Clear Acrylic Lens

3500K CCT
WATTS: 27
LUMENS: 3609
LPW: 135

PRFL-24-I-CA-35-**HO**-4
Clear Acrylic Lens

3500K CCT
WATTS: 33
LUMENS: 4511
LPW: 135

PRFL-24-I-CA-35-**S3D**-4
DLC V5.1 Standard

3500K CCT
WATTS: 23
LUMENS: 3440
LPW: 150

RFL-24-I-CA-40-**S4D**-4
DLC V5.1 Standard

4000K CCT
WATTS: 23
LUMENS: 3540
LPW: 154



Batwing Lens

RFL-24-DI-BW-35-**LO**-4
Batwing Lens

3500K CCT
WATTS: 20
LUMENS: 2150
LPW: 108

PRFL-24-DI-BW-35-**SO**-4
Batwing Lens

3500K CCT
WATTS: 27
LUMENS: 2866
LPW: 106

PRFL-24-DI-BW-35-**HO**-4
Batwing Lens

3500K CCT
WATTS: 33
LUMENS: 3852
LPW: 116



Asymmetrical Lens

RFL-24-DI-AS-35-**LO**-4
Asymmetrical Lens

3500K CCT
WATTS: 20
LUMENS: 2360
LPW: 118

PRFL-24-DI-AS-35-**SO**-4
Asymmetrical Lens

3500K CCT
WATTS: 27
LUMENS: 3146
LPW: 116

PRFL-24-DI-AS-35-**HO**-4
Asymmetrical Lens

3500K CCT
WATTS: 33
LUMENS: 3932
LPW: 119



Collimating Lens

RFL-24-DI-CM-35-**LO**-4
Collimating Lens

3500K CCT
WATTS: 20
LUMENS: Consult Factory

PRFL-24-DI-CM-35-**SO**-4
Collimating Lens

3500K CCT
WATTS: 27
LUMENS: Consult Factory

PRFL-24-DI-CM-35-**HO**-4
Collimating Lens

3500K CCT
WATTS: 33
LUMENS: Consult Factory

*3500K @ 80CRI, 4', 43% Direct, 57% Indirect Distribution, CA lens (lambertian).
Use the following multipliers for other CCTs: 2700K x 0.96, 3000K x 0.98, 4000K x 1.02, 5000K x 1.03. IES files @ www.dayolite.com

Specifications

CONSTRUCTION: Extruded aluminum housing. 20 gauge cold rolled steel internal components.

REFLECTOR: Die-formed steel finished in highly reflective baked white enamel with pre-finished reflective LED tray.

OPTICS: Clear acrylic dust covers standard. Options include acrylic Flush, Satin Ice, Batwing, Asymmetrical and Collimating lenses.

LED: Static white LED modules in 27/30/35/40 & 50K CCT, 80/90CRI. Lumen maintenance minimum L_{70}= 50,000 hours. 3 SDCM color consistency. BIOS SkyBlue, RGB, RGBW and Tunable White and Advanced Color options available.

DRIVER: Standard driver is Class 2 AOC 0-10V to 1%, 120/277V input, PF > 90%, THD < 20 @ 120V. Additional dimming protocols available. All drivers prewired from factory for connection to control system (by others). Field replaceable.

MOUNTING: Standard installation is wall mount with included mounting brackets and hardware. Requires single-gang j-box supplied by others.

FINISH: Housing and components finished in baked white enamel.

CERTIFICATION: cETLus listed conforming to UL STD. 1598 and certified to CSA STD C22.2 NO. 250.0. Suitable for dry & damp locations. Union Made in the United States of America. I.B.E.W., BAA compliant, DLC V5.1 Standard Listed. Declare Red List Approved.

LEGAL: Day-O-Lite, a division of SCW Corporation. All rights reserved. The Day-O-Lite logo is a registered trademark of SCW Corporation. Day-O-Lite reserves the right to change specifications without notice for product improvement.

RS Rapid Ship Program

Rapid Ship products are estimated to ship 10 business days or less from the morning the order is received and confirmed. Linear rows will ship 10 business days or less from the day the layout drawings are approved. Orders confirmed and layouts approved after 12:00 p.m. Eastern Time are estimated to ship 10 days or less from the following business morning. Please refer to complete program Terms & Conditions at www.dayolite.com.

Rapid Ship options are limited to those highlighted in **blue** on the Ordering Guide. 400' max individual or continuous row allowed. Consult factory for additional information.