

MICROLUX INSTALLATION INSTRUCTIONS

REMOTE DRIVER BOX



RISK OF ELECTRICAL SHOCK.
DISCONNECT POWER
BEFORE INSTALLATION OR
SERVICING.



**TO BE INSTALLED BY A
QUALIFIED ELECTRICIAN IN
ACCORDANCE TO LOCAL &
NATIONAL ELECTRIC CODES.**



**FAILURE TO COMPLY TO
INSTRUCTIONS &
FORMENTIONED WARNINGS
COULD VOID PRODUCT
WARRANTY**




**CEILING TO BE PROPERLY
REINFORCED TO SUPPORT
WEIGHT OF THE FIXTURE.**



**REFERENCE SHOP
DRAWINGS FOR CRITICAL
MOUNTING DIMENSIONS.**




**DO NOT CONSTRUCT ROW
ON FLOOR & LIFT TO
CEILING.**


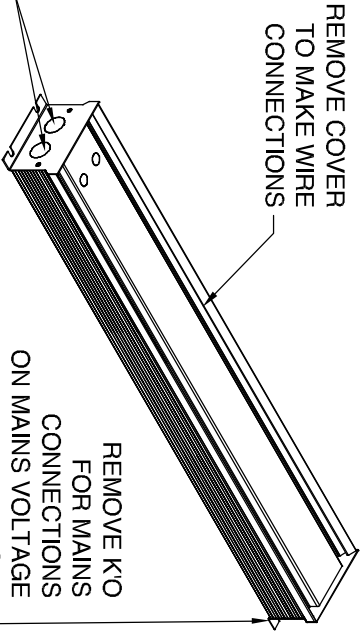


REMOVE K'O
FOR LOW VOLTAGE
WIRE CONNECTION


SLIDE END RIGHT ONTO ALIGNMENT PINS
AND PULL TOGETHER UNTIL SEAM IS TIGHT

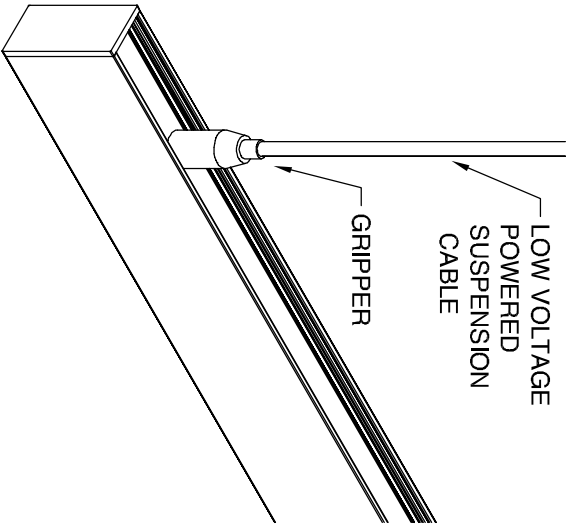

1. HANG FIXTURE: INSTALL CABLE IN MOUNTING LOCATIONS ACCORDING TO INSTRUCTIONS SUPPLIED WITH MOUNTING KIT. TIGHTEN CABLE GRIPPER IN POSITION
2. POWERED SUSPENSION CABLES ARE FACTORY INSTALLED FIXTURE. REFER TO JOB DRAWINGS FOR JOB SPECIFIC WIRING . FIXTURE COMES WITH (2) LOW VOLTAGE POWER CABLES, WITH STRIPPED ENDS.
3. E. C. TO PROVIDE JUNCTION BOX BOTH END FOR MOUNTING BRACKETS AND WIRING
4. E. C. TO RUN WIRES FROM JUNCTION BOX TO REMOTE DRIVER BOX. CONNECT BLACK WIRE FROM FIXTURE TO THE BLUE WIRE IN THE REMOTE DRIVER BOX AND RED WIRE FROM FIXTURE TO THE RED WIRE IN REMOTE JUNCTION BOX.
5. CONNECT MAINS POWER TO THE REMOTE DRIVER BOX

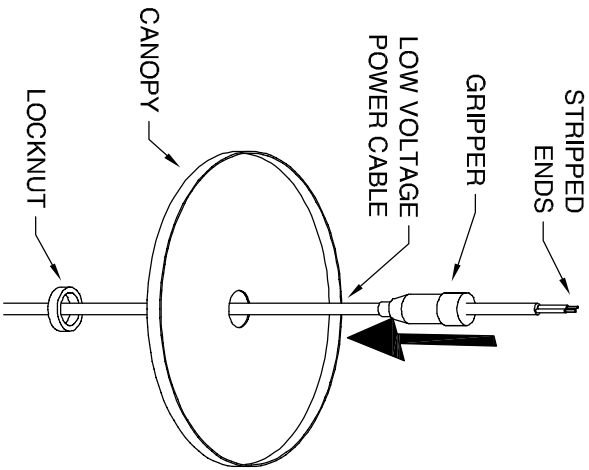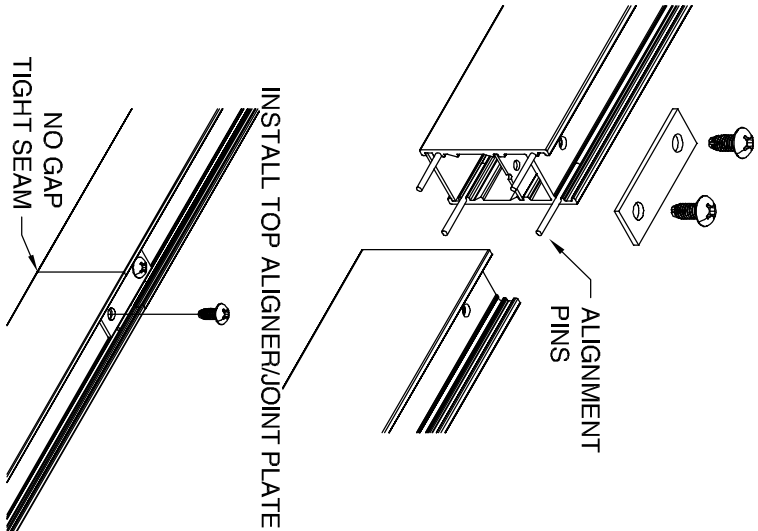

MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. DISCONNECT POWER DURING INSTALLATION/SERVICING. ROW CONFIGURATION IS JOB SPECIFIC, CONSULT SHOP DRAWINGS BEFORE CONSTRUCTING ROWS. STANDARD OPTIONS/SIZES SHOWN, OTHER OPTIONS AVAILABLE WITH SIMILAIR INSTALLATION. BE SURE TO UNDERSTAND ALL PROCEDURES PRIOR TO INSTALLATION. IMPORTANT: THE NATIONAL ELECTRIC CODE REQUIRES THAT ANY FIXTURE IN EXCESS OF 50 POUNDS MUST BE INDEPENDENTLY SUPPORTED OF THE OUTLET BOX. DAY-O-LITE IS NOT RESPONSIBLE FOR INADEQUATE REINFORCEMENT OF STRUCTURAL SUPPORT SYSTEMS. DAY-O-LITE RESERVES THE RIGHT TO MAKE ANY MECHANICAL OR MATERIAL CHANGES TO THE FIXTURES WHICH DO NOT AFFECT THE APPEARANCE OR PERFORMANCE. THIS PRINT IS THE PROPERTY OF DAY-O-LITE AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT WRITTEN CONSENT OF DAY-O-LITE.

MODEL NO.: MICROLUX-AC		PART NUMBER: 970190A0	
CONTACT INFORMATION: 126 Chestnut Street, Warwick, RI 02888 Tel. (401) 467-8232 Fax. (401) 941-2960 E-mail: sales@dayolite.com WWW: http://www.dayolite.com		PAGE: SHEET 1 OF 1	
		ISSUED ON: 1/1/025	
		 DAY-O-LITE Lighting Without Limits	